


Control
& monitor

Elektravägen 53
SE-126 30 Hägersten, Sweden
+46 10 252 30 00
www.ozonetech.com

O3Eye™

O3Eye™ control system controls and monitors the entire ozone system including peripheral components. The unit also provides external systems with status and alarm signals.

With our Premium Service Agreement your O3Eye™ will be connected to Ozonotech's own system enabling remote control and monitoring - and give you peace of mind.

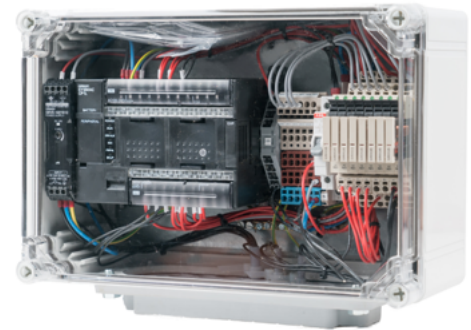

Technical specification

Inputs	9
Outputs	5
Indication	Diodes for all digital inputs and outputs
Options	Ozonotech supervision w/ Premium SLA 2 or 3 ambient sensor connections
Ambient conditions	
Temperature	0 to +40 °C (+32 to +104 °F)
Humidity, max	85 % (R. H.) non-condensing
Electrical connections	
Voltage rating	230 VAC, 50 Hz
Optional	115 VAC, 60 Hz
Dimensions	
Size (H x W x D)	200 x 300 x 132 mm (7.9 x 11.8 x 5.2 in)
Weight	3.6 kg (7.9 lbs)
IP class	IP67
Options	Stainless steel cabinet

Advantages

- Automatic remote control & operation
- Optimal start/shutdown procedures
- Custom-made for Ozonotech
- Includes PSU for standard accessories
- Ready to connect to Ozonotech cloud
- Solid design and quality



© Ozonotech

ozonetech.
a MELLIFIQ brand